PROSAW

THE PEOPLE TO SEE FOR SAWS

BOMAR®

Construction 1150.600DGS

Semi-automatic, Twin Column, Two-way Mitre Bandsaw



CAPACITIES (mm) & SPECIFICATION

⌐	○	▭	▯	□
0°	600	1150 x 600	1150 x 600	600
45° R	600	790 x 580	790 x 580	580
45° L	600	790 x 530	790 x 530	530
60° R	530	530 x 580	530 x 580	530
60° L	530	530 x 480	530 x 480	480
Blade Size - 8370 x 54 x 1.6			Speed - 15 to 90 m/min	
Dimensions – 4400 x 1800 x 2600			Weight - 5500kg	

FEATURES

- 2-way Powered mitring – 60° left - 45° – 0° - 45° - 60° right
- Support table swivels with bow, table isn't cut
- Powerful 5.5kW drive motor
- Digital readout of mitre angle
- Long stroke hydraulic vice
- Hydraulic blade tension
- 6° inclined blade for optimum cutting rate
- Powered bow raise with digital stroke height limit
- Automatic cutting pressure regulation
- Vice pressure regulation
- Split vice to clamp material both sides of blade
- Control box mounted on pedestal
- Simple, robust push button controls
- Invertor Variable blade speed 15 - 90rpm
- 54mm blade width
- Bed Height – 770mm
- Top 'Bundle' clamp


PROSAW LIMITED 15 Telford Way, Kettering, Northants, NN16 8UN. Tel: +44 (0)1536 410999

sales@prosaw.co.uk www.prosaw.co.uk Company registration: 01115014


PROSAW

THE PEOPLE TO SEE FOR SAWS

BOMAR®

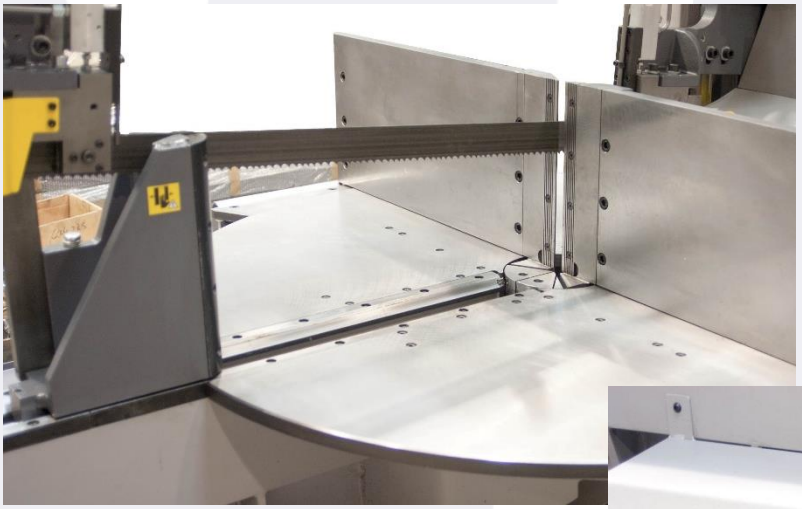

Split vice – clamps both sides of blade (90°)

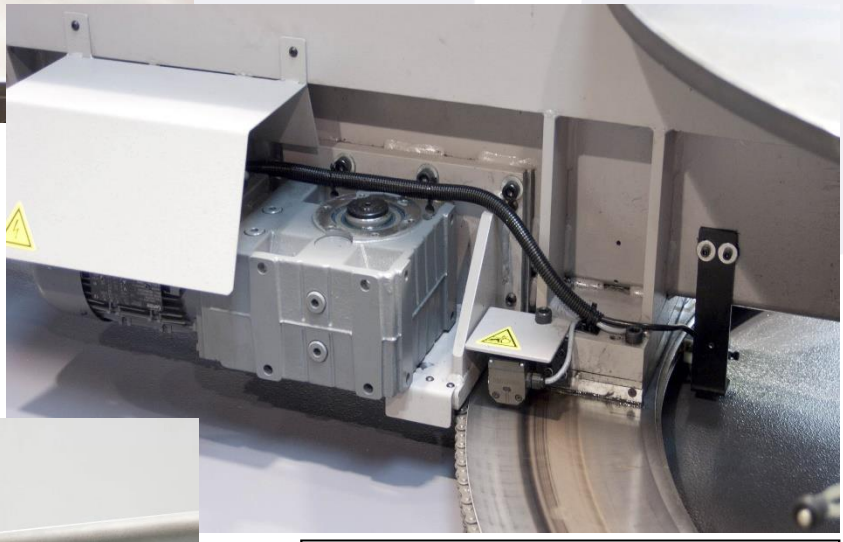

Powered mitring -60°, -45°, 0°, +45°, +60°



Automatic down feed regulation

OPTIONAL ACCESSORIES

- Down feed speed readout
- Spray mist lubrication
- Laser alignment beam
- Third coolant hose
- Halogen lamp
- Coolant pistol for machine cleaning
- Material handling & measuring