
PROSAW

THE PEOPLE TO SEE FOR SAWS

BOMAR®

Construction 820.450DGS

Semi-automatic, Twin Column, Two-way Mitre Bandsaw

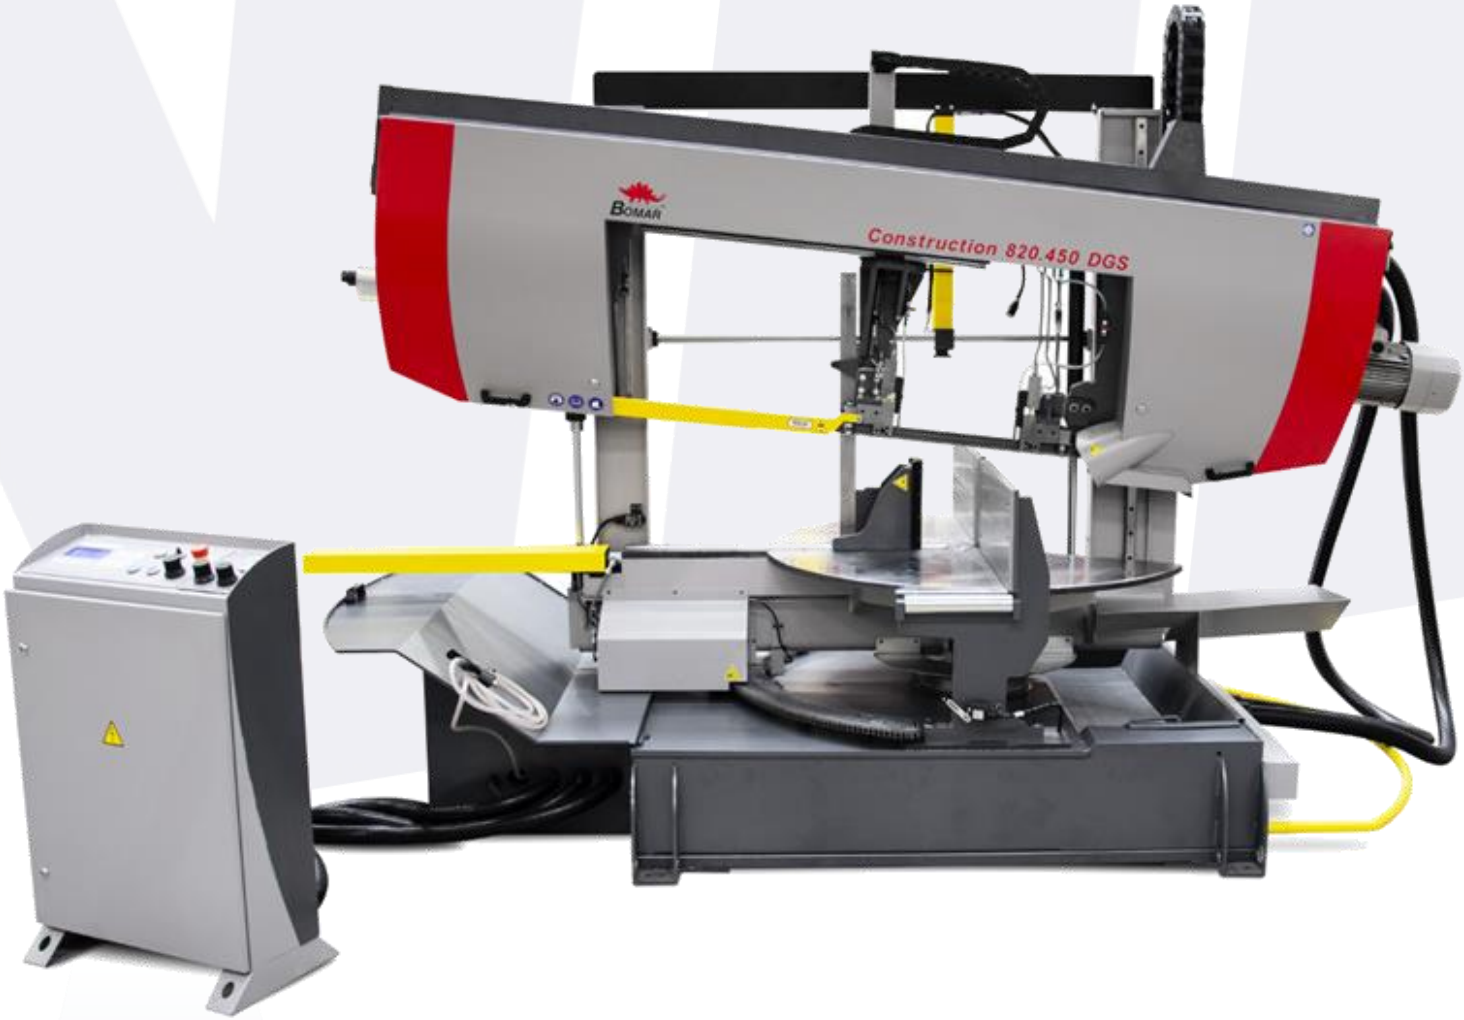

CAPACITIES (mm) & SPECIFICATION

⌐	○	▭	▯	□
0°	500	820 x 500	820 x 500	500
45° R	500	560 x 500	560 x 500	500
45° L	500	560 x 500	560 x 500	500
60° R	360	360 x 500	360 x 500	360
60° L	360	360 x 500	360 x 500	360
Blade Size - 6470 x 41 x 1.3			Speed - 20 to 90 m/min	
Dimensions – 3750 x 1600 x 2487			Weight - 2800kg	

FEATURES

- 2-way Powered mitring – 60° right, 60° left
- Support table swivels with bow, table isn't cut
- Powerful 4kW drive motor
- Digital readout of mitre angle
- Long stroke hydraulic vice
- Hydraulic blade tension
- 6° inclined blade for optimum cutting rate
- Powered bow raise with digital stroke height limit
- Automatic cutting pressure regulation
- Vice pressure regulation
- Split vice to clamp material both sides of blade
- Control box mounted on pedestal
- Simple, robust push button controls
- Invertor Variable blade speed 20 - 90rpm
- 41mm blade width
- Bed Height – 780mm
- Top 'Bundle' clamp


PROSAW LIMITED 15 Telford Way, Kettering, Northants, NN16 8UN. Tel: +44 (0)1536 410999

sales@prosaw.co.uk www.prosaw.co.uk Company registration: 01115014


PROSAW

THE PEOPLE TO SEE FOR SAWS

BOMAR®

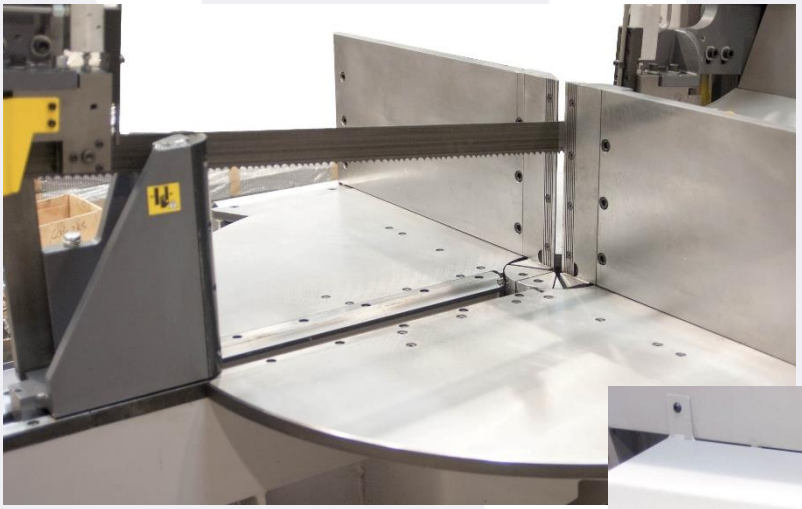

Split vice – clamps both sides of blade (90°)

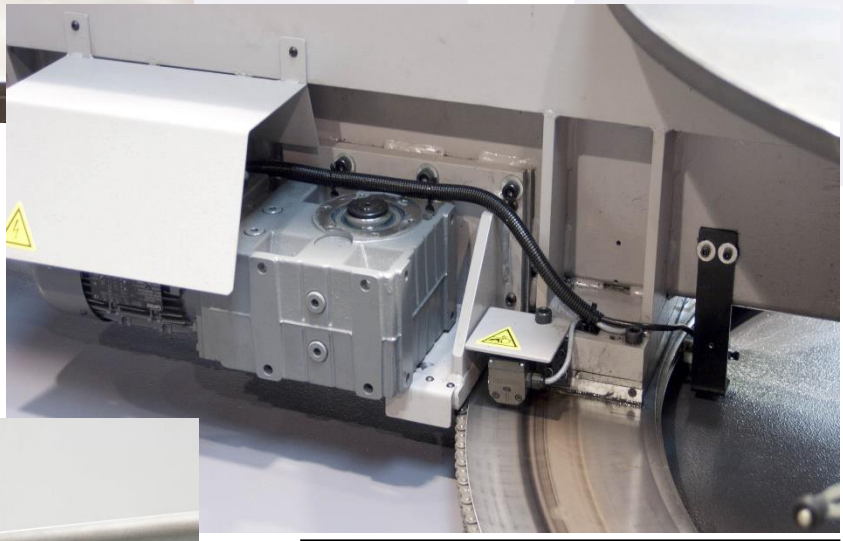

Powered mitring -60°, -45°, 0°, +45°, +60°



Automatic down feed regulation

OPTIONAL ACCESSORIES

- Down feed speed readout
- Spray mist lubrication
- Laser alignment beam
- Third coolant hose
- Halogen lamp
- Coolant pistol for machine cleaning
- Material handling & measuring