



KSA 600x800

Twin Column, Semi-automatic Straight-cutting Bandsaw



*Image shows machine with
optional hydraulic top clamps*

Features

- Very heavy-duty, twin column design
- 5° canted head
- Hydraulic blade tensioning
- Bow descends on hardened linear bearing rails
- Independently adjustable hydraulic regulation of the bow descent rate and pressure
- Powerful 5.5kW blade drive motor
- 54mm wide blade
- Blade alignment via double bearing system and carbide plates
- Movable guide arms
- Electronic controls
- Steplessly variable blade speed 25 to 90m/min
- Full stroke hydraulic vice with pressure regulation
- Powered swarf conveyor
- Powered swarf brush
- Working height: 730mm
- Supplied with two, 2m long roller tables
- Powered tables available as options

PROSAW LIMITED
15 Telford Way, Kettering,
Northants, NN16 8UN

Tel: +44 (0)1536 410999
sales@prosa.co.uk
www.prosa.co.uk

Continued



Hydraulic Blade Tensioning



Vice Pressure Reduction



Swarf Conveyor



Full Stroke Hydraulic Vice



2 Off - 2m Roller Tables Included

CAPACITIES (mm) & SPECIFICATION

			
0°	610	800 x 560	560
Blade Size - 6700 x 54 x 1.6		Speed - 25 to 90 m/min	
Dimensions - 3150 x 1470 x 2140		Weight - 2,750kg	


Optional Extras



Long Stroke Feeder



Hydraulic Top Clamps

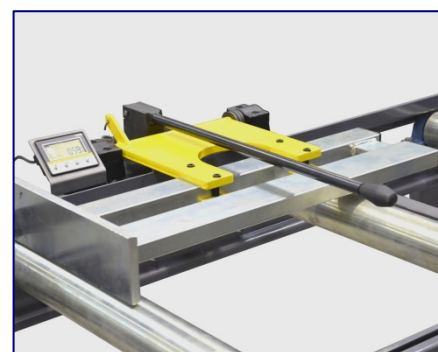

Measuring