


Bomar Individual 620.460DGANC LS-2300mm Twin Column, Automatic, Two Way Mitre Bandsaw

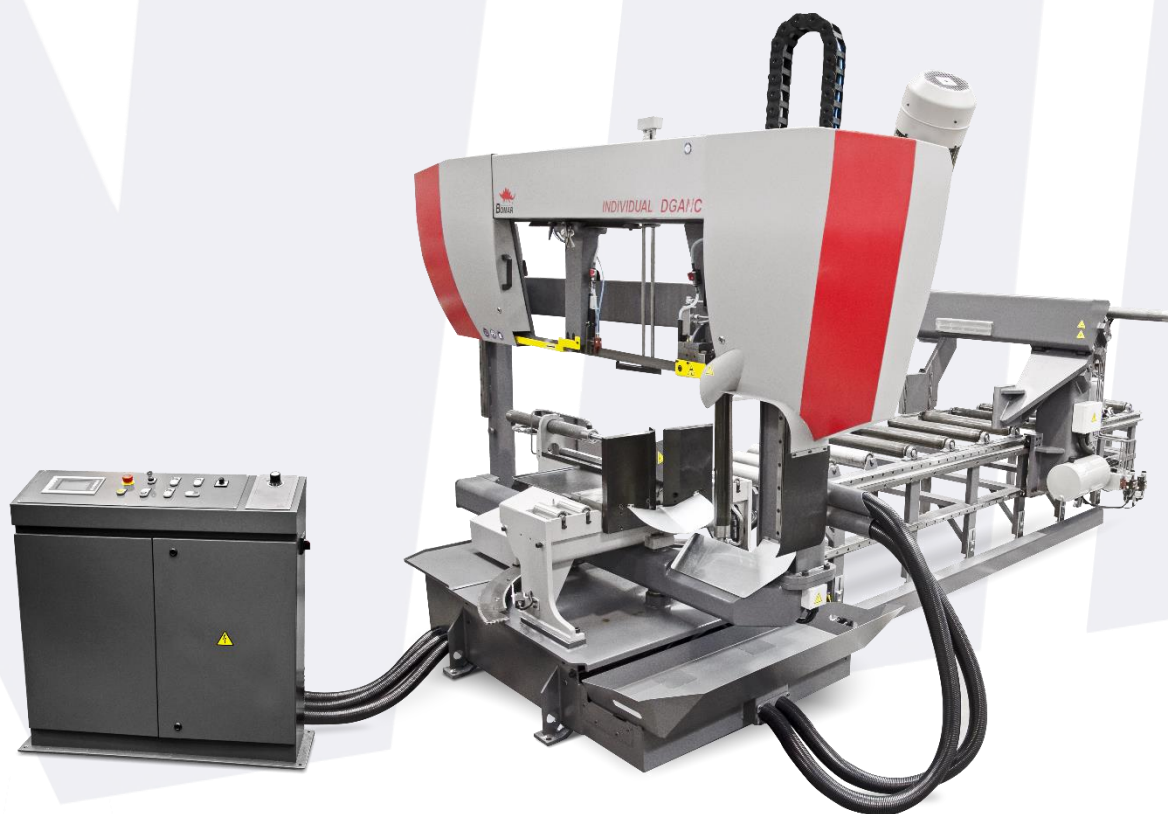

CAPACITIES (mm) & SPECIFICATION

				
0°	445	620 x 435	100 x 450	440
45° R	420	420 x 435	100 x 450	420
45° L	420	430 x 435	100 x 450	420
60° R	275	275 x 435	100 x 450	275
60° L	300	300 x 435	100 x 450	300
Blade Size - 6100 x 41 x 1.3		Speed - 20 to 120 m/min		
Dimensions - 6200 x 3000 x 2350		Total Weight - 3850kg		

Options

Feeder extension
Bundle clamps
Vice pressure regulation
Swarf conveyor
Perimeter fencing
USB data port

Hydraulic blade tension
Remote assistance diagnostics
Spray mist lubrication
Halogen lamp
Coolant cleaning gun and hose
Laser line
Downfeed speed readout

FEATURES

- Twin Column Construction
- Linear bearings control bow movement
- 2° inclined blade to absorb vibration
- Fast approach 'T' bar to detect material
- Powered 'chain driven' 2-way mitre to 60° L&R with DRO
- Max 2300mm feed length per stroke
- Max 9999.9mm feed length multi stroke
- Powerful 4kW drive motor
- Long stroke hydraulic vices
- Automatic control of cutting pressure relative to material resistance
- Independent Control Cabinet
- Simple, robust push button controls with Siemens HMI
- Variable blade speed 20 to 120rpm
- 41mm blade width