

Tiger 352 SX evo

Heavy Duty
Vertical Action
Two-way mitre
Semi-automatic
Circular Saw



The roller conveyors & measuring system shown are available as options.


Features

- Semi-automatic operation
- Easy, positive 45° right / 60° left mitre
- Mechanical stops at -45°, 0°, +45° & 60°
- Anti-burr clamp with double locking system
- User friendly control panel includes programmable sawing stroke, saw head feed rate control and LED diagnostics display
- Cast iron structure absorbs vibration for cut stability and longer blade life
- Motor and gearbox mounted on dual precision linear rails to reduce vibration
- Two-stage gear transmission guarantees a high cutting efficiency and torque
- Blade speeds of 15, 30, 45 & 90rpm
- Vertical pneumatic vice
- Internal recirculating coolant pump
- Adjustable pneumatic vice pressure
- Replaceable blade brush


Features continued...




Removable Swarf Tray

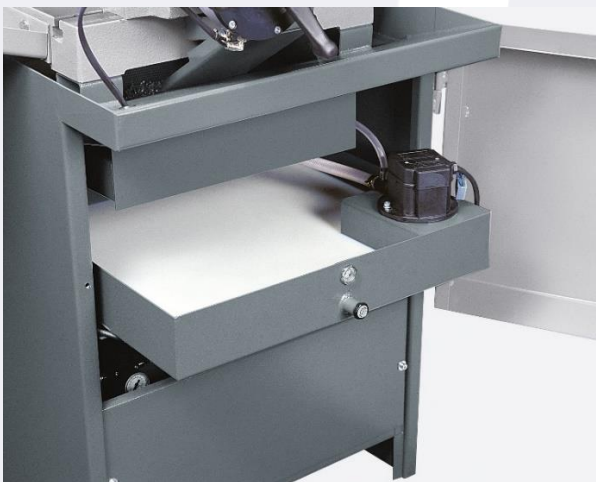

Flood Coolant

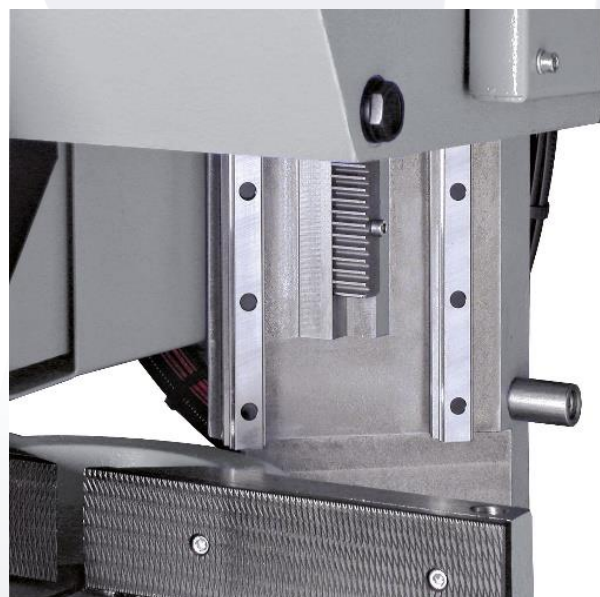

Precision Linear Guide Rails

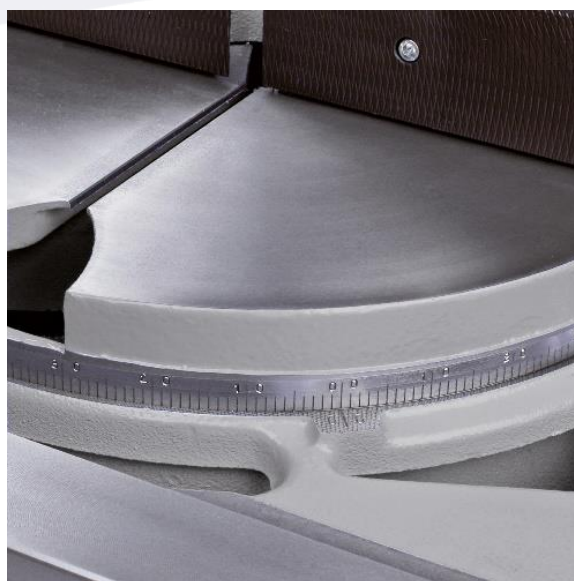

Rotating Table with Precision Scale

											
HSS				0°	350	115	95	180x95	350	90	
mm	kW	rpm	mm	+ 45°	350	110	95	125x95	350	64	
				+ 60°	350	90	90	90x90	350	45	kg
350x32x2,5	1,8/2,5	15/30/45/90	190	- 45°	350	110	95	125x95	350	64	410


Optional Extras




Remote Foot Control Pedal



Mist Spray Lubrication

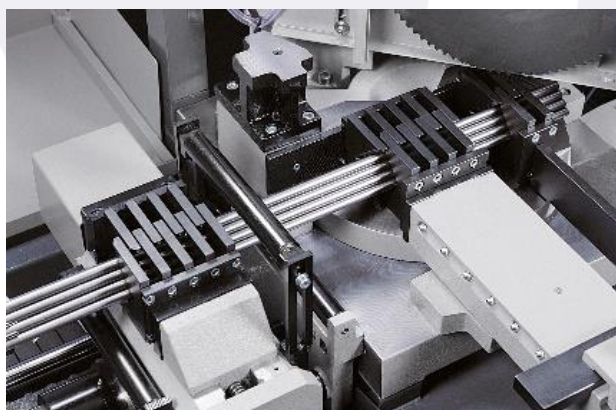

Comb Jaws for Bundle Cutting Tubes

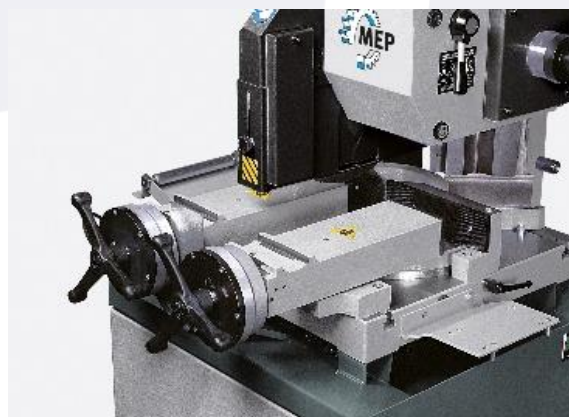

Additional Off Cut Vice



Roller Conveyors for Infeed & Outfeed



Measure Stops